


Features		Parameter	
■ 2-wire system		Nominal voltage U_n	5 V
■ 5V signal system		Max. continuous operating voltage $U_c(DC)$	6 V
■ Strong resistance to surge		Max. continuous operating voltage $U_c(AC)$	4 V
■ 7.4mm Ultra-thin design		Nominal current I_n	600 mA
■ Support terminal grounding (optional)		Total lightning impulse current limp(10/350 μs).D1	5 kA
■ 35 mm rail mounted		Lightning impulse current limp(10/350 μs).D1	2.5 kA
Description		Max. discharge current $I_{max}(8/20 \mu s).C2$	20 kA
This SPD limits induced transients of different origin (lightning stroke, switching impulse, etc.). This is achieved by diverting the transient current to ground and limiting the signal line voltage to a safe level for the duration of the surge.		Nominal discharge current $I_n(8/20 \mu s).C2$	10 kA
It can be applied to 2 wire RTD, TC, RS-485 , MODBUS ,PROFIBUSDP ,CAN ect.		Voltage protection level $U_p(8/20 \mu s) , C2$	L-L≤45 V / L-PE≤45 V
		Voltage protection level $U_p(1 kV/\mu s) , C3$	L-L≤15 V / L-PE≤15 V
		Bandwidth fG(100 Ω resistance)	100 MHz
		Series impedance	1.8 Ω
		Response time T_a	<1 ns
		General parameters	
		Operating temperature	-40 °C ~ +80 °C
		Installation	35 mm DIN rail
		Grounding mode	Rail/ terminal (optional)
		Connecting wire size	0.2 mm ² ~ 2.5 mm ²
		Material	PC
		Flame retardant grade(UL94)	V0
		Protection degree	IP20
		Standards	IEC 61643-21/ GB/T 18802.21




Graphics

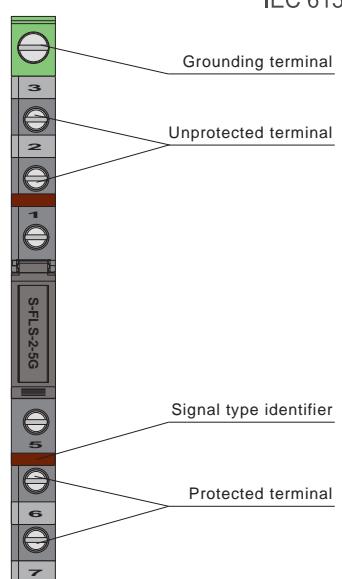


SIL3
IEC 61508

Schematic



Dimensions

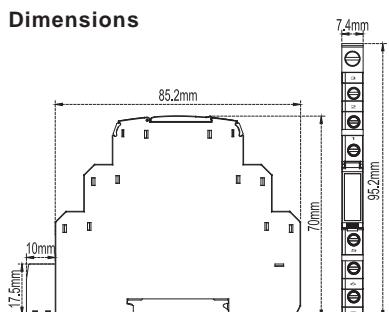

Application

